

RD45F.1.S系列 - 封闭两侧可打开

Series of RD45F.1.S-Sealing type both side opening



闭合状态：
Opening type:

- Q** 桥式
Bridge type
- F** 全封闭式
Enclosed
- BF** 半封闭式
Semi-enclosed

注：无字母为普通型
Note: blank means general type

打开方式：
Opening way:




- B** 不可打开
Non-opening
- S** 双侧打开
Open of both side
- W** 外侧打开
Exterior opening
- N** 内侧打开
Interior opening
- F** 无需打开
Without opening

款式：
Style:

- Q.B** 桥式不可打开
Bridge type non-opening
- Q.N** 桥式内侧开
Bridge type interior opening
- Q.W** 桥式外侧开
Bridge type exterior opening
- Q.S** 桥式双侧可打开
Bridge type both side opening
- BF.B** 半封闭不可开
Semi-enclosed non-opening
- BF.N** 半封闭内侧开
Semi-enclosed interior opening
- BF.W** 半封闭外侧开
Semi-enclosed exterior opening
- BF.S** 半封闭双侧开
Semi-enclosed both side opening
- F.N** 封闭内侧开
Enclosed interior opening
- F.W** 封闭外侧开
Enclosed exterior opening
- F.S** 封闭双侧开
Enclosed both side opening



接头类型：
Bracket type:

- X** 斜型接头
Oblique bracket
- F** 方型接头
Square bracket

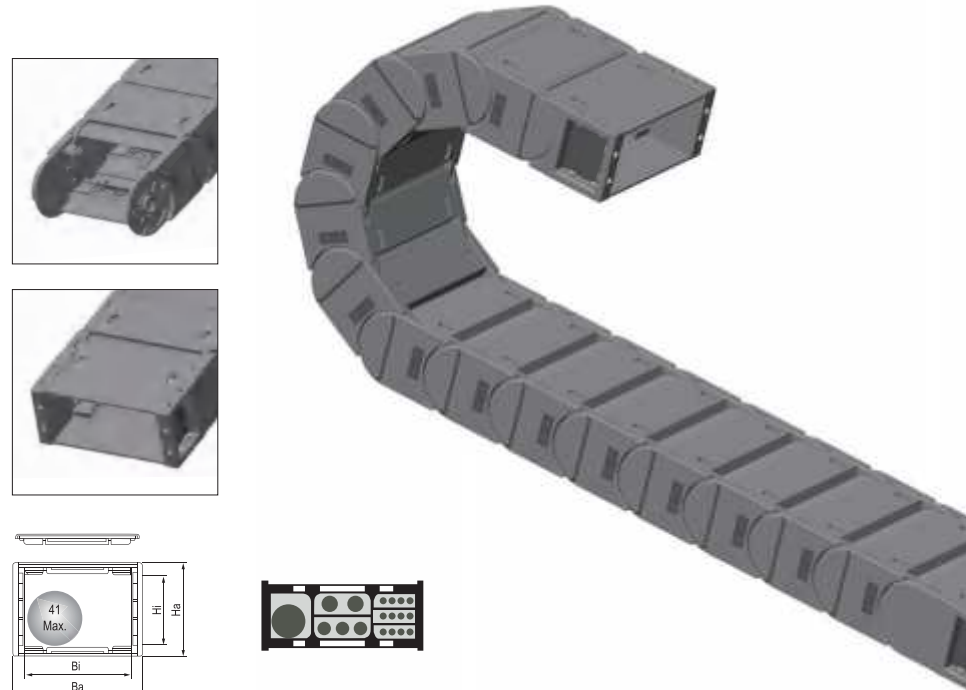

- ◎ The cable chain tested service life is up to 20 million times.
- ◎ The ledge of cable chain is able to open to inspect or replace cable.
- ◎ The cable chain can be mounted separator and cross separator to divide space and effectively protect cables. (See accessories table)
- ◎ The cable chain is suitable for a diameter of 41mm or less of cable.
- ◎ 测试使用寿命达 2 千万次
- ◎ 可将拖链内外侧封闭片打开，方便检查或更换线缆
- ◎ 可装竖隔片、横隔片区分空间，更有效保护线缆（见选配区）
- ◎ 适用于直径 41 毫米以下线缆

主要技术参数 Basic technical data

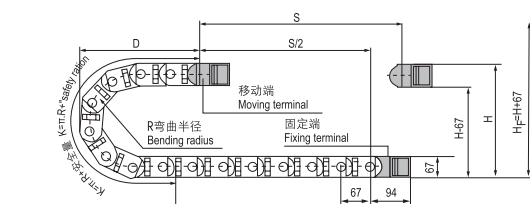


节距=67mm, 每米节数=15, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=67mm, link per meter=15, length of chain=S/2+K, S=stroke, K=π.R+“safety ration”

R	125	150	175	200	225	250	300
H	317	367	417	467	517	567	667
D	226	251	276	301	326	351	401
K	536	670	737	804	871	938	1139

安装实际高度: H_i=H+67mm(负载 2.2kg/m)
Actual mounting height: H_i=H+67mm/load 2.2kg/m

RD45F.1.S 系列 - 封闭两侧可打开 Series of RD45F.1.S-Sealing type both side opening

示意图 Drawing

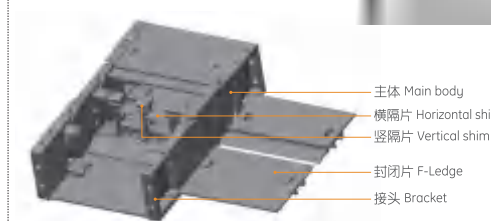


选配区 Accessories table



系列号 Series No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters							代号 No.	
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)hole distance						
		A	B	C	D	E	F								
RD45F.1.75S	45	75	67	99	F.S	125,150, 175,200,225, 250,300	F-F	6	24	90	94	26	15	105	RD45F.1.75S-FJT
RD45F.1.100S	45	100	67	124	F.S		F-F	6	24	115	94	26	15	130	RD45F.1.100S-FJT
RD45F.1.125S	45	125	67	149	F.S		F-F	6	24	140	94	26	15	155	RD45F.1.125S-FJT
RD45F.1.150S	45	150	67	174	F.S		F-F	6	24	165	94	26	15	180	RD45F.1.150S-FJT
RD45F.1.175S	45	175	67	199	F.S		F-F	6	24	190	94	26	15	205	RD45F.1.175S-FJT

注：S 表示两侧可打开
Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

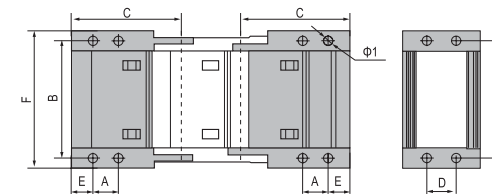

F-F 型接头 F-F type bracket

订货示例 Order Sample

示例 拖链内高 45mm、内宽 75mm、半径 125mm、长度 1 米 /15 节 (Sample: inner height 45mm, inner width 75mm, radius 125mm, length 15 links/1 meter)

拖链 Chain RD45F.1.75S R125 1000mm /15 Links

接头 Bracket RD45F.1.75S-XJT 翻 (Set)

配件 Accessories 每节装 1 个竖隔片 /1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注：可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.